



KIT COMPONENTS

A) Double Din Trim Plate • B) Double DIN Brackets


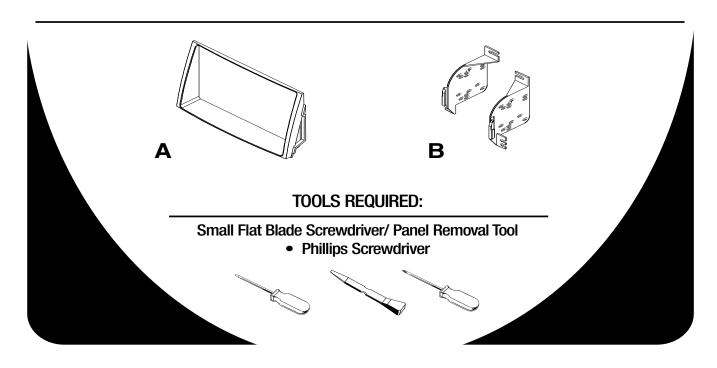



TABLE OF CONTENTS


<u>Dash Disassembly</u>
- Hyundai Azera 2006
<u>Kit Assembly</u>
- Double DIN Radio Provision
- Stacked ISO Units Provision
Final Assembly
*Note: Refer also to the instructions included with the aftermarket radio.

HYUNDAI AZERA 2006

- 1 Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2 Remove (1) Phillips head screw from bottom right hand corner then unclip and let the panel below the steering column hang. (Figure A)
- 3 Remove (1) Phillips screw from the lower left side of the radio panel behind panel removed in step 2. (Figure B)
- 4 Unclip and remove the trim panel above the radio that extends across the dash to the passenger side.
 (Figure C)

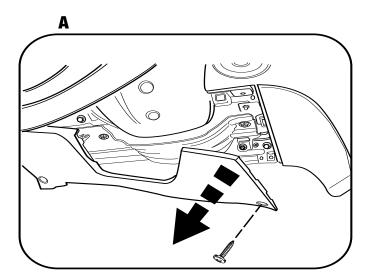

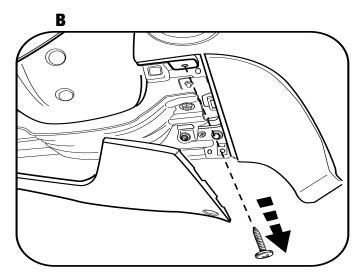


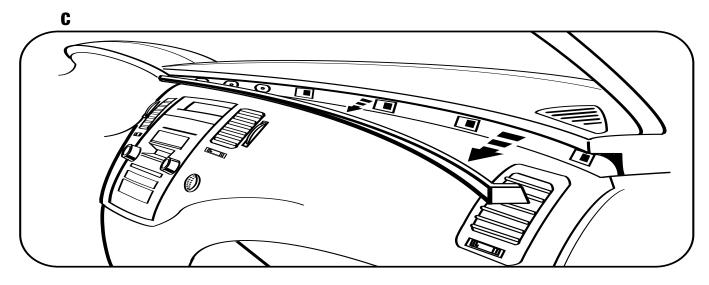



HYUNDAI AZERA 2006


- **5** Remove (3) Phillips screws from the top of the radio trim panel. (Figure D)
- 6 Remove (2) Phillips screws from under radio trim panel. (Figure E)
- 7 Unclip and remove the entire trim panel surrounding the radio. (Figure F)
- 8 Remove (4) Phillips screws securing the radio. Unplug and remove radio. (Figure G)

Continue to kit assembly.

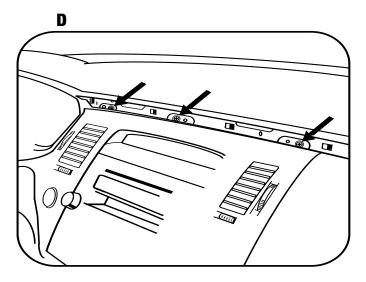

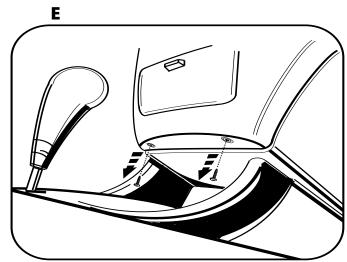

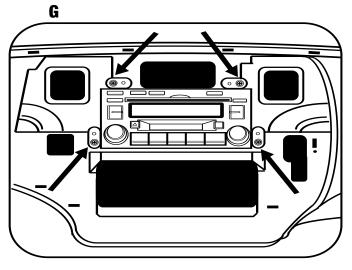

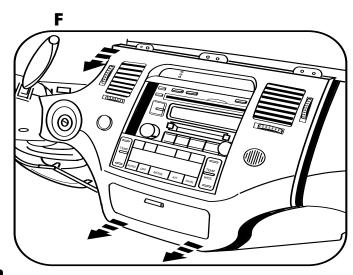



DOUBLE DIN RADIO PROVISION

*Note: Refer also to the instructions included with the aftermarket radio.

- 1 Snap the Double DIN brackets to the outside edge of the Double DIN trim plate. (Figure A)
- 2 Slide the Double DIN radio into the bracket/trim plate assembly and secure the radio to the assembly using the screws supplied with the radio. (Figure B)

Continue to final assembly.

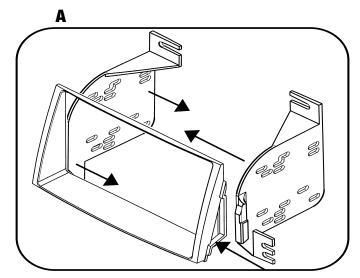

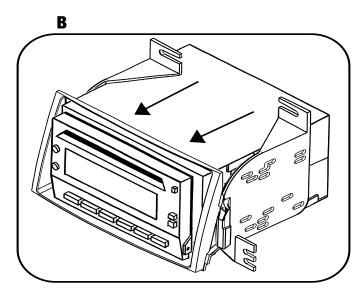

STACKED ISO UNITS PROVISION

*Note: Refer also to the instructions included with the aftermarket radio.

- 1 Snap the Double DIN brackets to the outside edge of the Double DIN trim plate. (Figure A)
- 2 Slide the stacked ISO units into the bracket/radio housing assembly and secure the units to the kit using the screws supplied with the units. (Figure B)

Continue to final assembly.

