


MODIFICATION SHEET FOR RCE-101F & W

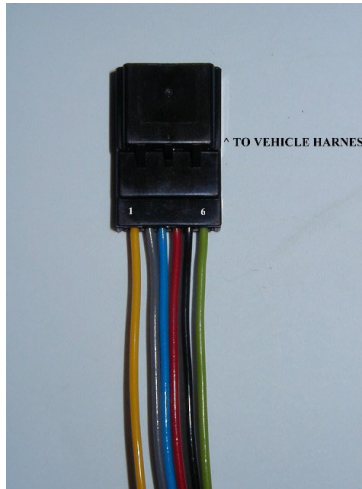

How RCE-101F & W is wired to operate Chrysler Grand Cherokee to May 2001.

- a.) Connect BLUE wire to BLUE wire Pin 3.
- b.) Connect BLACK wire to BLACK wire Pin 5.


How to modify RCE-101F & W to operate Chrysler Grand Cherokee from May 2001 to 2006.

- a.) Connect BLUE wire to YELLOW wire Pin 1.
- b.) Connect BLACK wire to GREY wire Pin 2.

How to modify RCE-101F & W to operate Chrysler Cherokee from Jan. 2002.

- a.) Connect BLUE wire to RED wire Pin 4.
(RED/BLUE IN THE VEHICLE).
- b.) Check BLACK wire is connected to 0v (EARTH)

How to modify RCE-101F & W to operate Chrysler Voyager from Jan. 2001 to 2007.

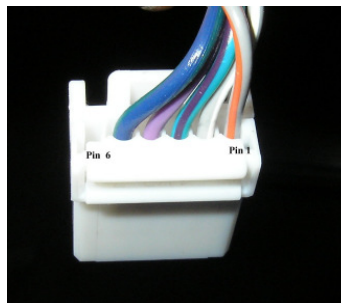

- a.) Leave White 6 way connector connected to vehicle.
- b.) Connect BLUE wire to GREY/WHITE IN VEHICLE wire Pin 2.
- c.) Connect BLACK wire to GREY/ORANGE IN VEHICLE Pin 1.