

**12.BKX1213-02**

**Clarion**



---

**RADIO MOUNTING KIT  
INSTALLATION INSTRUCTIONS**

©2000 AMERICAN INTERNATIONAL INDUSTRIES, INC.

594-0000

## DASH DISASSEMBLY INSTRUCTIONS


- 1) Disconnect the negative battery cable.
- 2) For automatic transmission vehicles: Remove the small trim ring from around the gear shift knob. For manual transmission vehicles: Carefully unclip the console boot(s) (equipped) or console panel with climate controls attached, remove the (2) phillips screws securing the climate control module box (white) pull forward and disconnect the harnesses attached to the climate control panel.
- 3) Remove the (2) Phillips screws securing the bottom of the dash/radio trim bezel located below the factory radio.
- 4) For vehicles without Navigation, open the upper dash trim pocket and remove the rubber mat from inside, and remove the (2) Phillips screws from this location. Pull upward on the pocket to remove. Remove the (2) Phillips screws from this location securing the radio/dash trim bezel to the sub-dash. For vehicles with Navigation, Very carefully pry upward on the navigation control panel, disconnect the harness and remove. Remove the (2) Phillips screws from this location.
- 5) NOTE: This is a very delicate dash bezel. Starting from the bottom, carefully pull radio & dash trim bezel forward (radio is mounted to the rear of the trim bezel), disconnect the upper gauge harness.
- 6) Carefully unplug and remove the wire harnesses and antenna lead from the radio and remove radio/dash trim bezel together.
- 7) Remove the (4) phillips screws securing the factory radio to the trim bezel and remove radio.

## KIT ASSEMBLY INSTRUCTIONS

### FOR DOUBLE DIN / 2 ISO MOUNT COMPONENTS

- 1) Place the Double DIN / Double ISO trim plate onto the left factory radio bracket using the alignment pins on the side of the trim plate.
- 2) Insert (1) ISO spacer bracket between the left factory radio bracket and the radio components.
- 3) Align the factory bracket holes with the ISO spacer holes and attach to left side of radio components using screws supplied from factory radio.
- 4) Repeat procedures 1-3 above for right side of radio components.
- 5) Reassemble dash in the reverse order of dash disassembly instructions.

### This kit includes

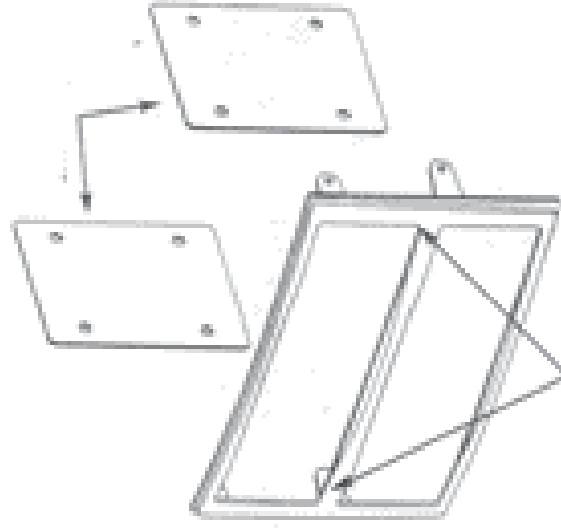

\*FOR DOUBLE DIN RADIO ONLY  
CUT & REMOVE CENTER RAIL. FILE  
SMOOTH INSIDE EDGES