


Clarion 2-DIN BKX-1321-05



Installation manual for: **Audi TT 2007 -->**

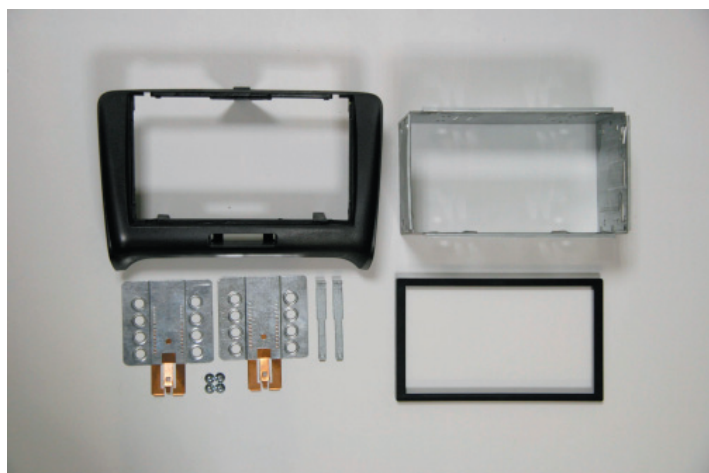

Installation kit includes the following items:



- * 1X 2-ISO 100 mm. metal bracket
- * 1X Replacement frame
- * 1X Radio trim
- * 2X Mounting plates
- * 2X Mounting spacers
- * 4X Screws
- * 2X Radio removal keys

EXAMPLE

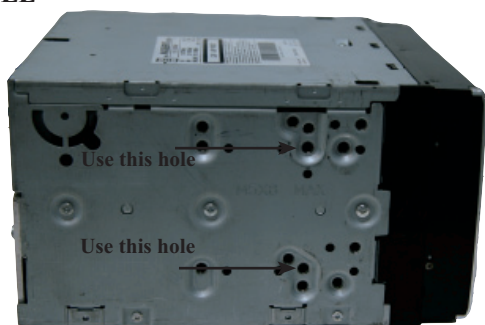

We advice to use the following positions.
Other positions are also possible.

Use position 2 marked with a cross.
Use position 20 & 22 marked with an arrow.
Measured from left to right.

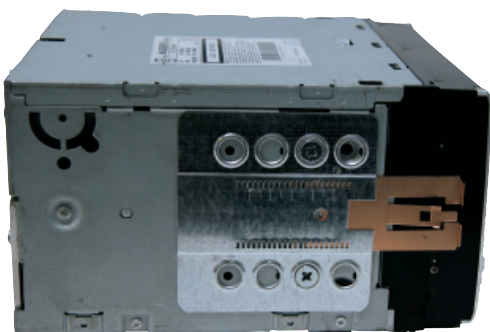

We advice to use the following positions.
Other positions are also possible.

Use position 2 marked with a cross.
Use position 20 & 22 marked with an arrow.
Measured from left to right.

* Mount the plates.

Remark: The fixing position can be different between Audio and Multimedia unit!

Clarion

2-DIN

BKX-1321-05



Remove the radio at the location of the arrows. Use the original radio release keys.



Remove the original airbag indicator.



Place the original airbag indicator.



Place the replacement panel.



Place the 2-Din metal bracket.



Place the headunit and radio trim.

Connect all of the needed wiring harnesses and check the connections carefully.