



The Ruggedness to Ride the Waves

Digital Video — The Newest Wave in Marine Entertainment



CMV1

CEA 2006 Power Ratings
17W x 4 RMS (4Ω@14.4V ≤1% THD+N)
S/N 77dB (Ref: 1W into 4Ω)

Watertight Marine DVD/CD/USB Receiver with CeNET Control



Engineered to Withstand Water and Salt (CMV1/CMD6/CMD7/CMS1)

Water is a marine source unit's worst enemy, and salt can be a nightmare. Our CMV1 and CMD6/CMD7 source units have been IPX5 tested and certified to offer the highest water intrusion protection and salt resistance in their class. Rubber gaskets stop water in its tracks, with integrated drainage channels to keep water out.



Stainless Steel for Durability Behind the Scenes (CMV1/CMD6/M309)

Should any water get behind the panel, the stainless steel chassis, along with an integrated drip shield over the main harness connector, helps protect internal circuitry from the effects of moisture, corrosion and mildew.

Essential Functions and Quality with Added Reliability



M309

CEA 2006 Power Ratings
21W x 4 RMS (4Ω@14.4V ≤1% THD+N)
S/N 91dB (Ref: 1W into 4Ω)

Marine CD/USB Receiver with CeNET Control



M109

CEA 2006 Power Ratings
20W x 4 RMS (4Ω@14.4V ≤1% THD+N)
S/N 88dB (Ref: 1W into 4Ω)

Marine CD Receiver



Feature Comparison

	DVD Video	DOLBY DIGITAL	iPod & iPhone Control	Sirius Direct Connect	XM Ready	BBE® MP	Audio Format	USB	Z-Enhancer Plus	Beat EQ	MAGNA BASS EX	Parametric EQ	AUX Input	Output	Fixed Audio Output	Water Resistant Chassis	Wired Remote Ready
CMV1	●	●	iPod Video	Ready	CNP2000UC + CNPCLA1	●	MP3/WMA/AAC	Rear	—	—	—	—	Rear x 2	2V/8ch	●	●	●
CMD6	—	—	iPod	Ready	CNP2000UC + CNPCLA1	●	MP3/WMA/AAC	Rear	—	—	—	—	Rear x 2	2V/8ch	●	●	●
CMD7	—	—	●	Ready	—	—	MP3/WMA	Rear	—	●	●	●	Rear	2V/4ch	—	—	●
M309	—	—	iPod	Ready	CNP2000UC + CNPCLA1	●	MP3/WMA/AAC	Rear	—	—	—	—	Front/Rear	2V/8ch	●	●	●
M109	—	—	—	—	—	—	MP3/WMA	—	●	—	●	●	Front	2V/4ch	—	—	—
CMS1	—	—	iPod	Ready	—	—	MP3/WMA	Rear	—	—	—	—	Rear	2V/2ch	—	●	●

* For functional details please visit the Clarion website.

Go Off Shore but Stay in Touch with Your Music



CMD6

CEA 2006 Power Ratings
21W x 4 RMS (4Ω@14.4V ≤1% THD+N)
S/N 91dB (Ref: 1W into 4Ω)

Watertight Marine CD/USB Receiver with CeNET Control



CMD7

CEA 2006 Power Ratings
19W x 4 RMS (4Ω@14.4V ≤1% THD+N)
S/N 80 dB (Ref: 1W into 4Ω)

Watertight Marine CD/USB Receiver



Hideaway Source Unit for Unique Applications



CMS1

CEA 2006 Power Ratings
16W x 4 RMS (4Ω@14.4V ≤1% THD+N)
S/N 74dB (Ref: 1W into 4Ω)

Digital Media Receiver with Watertight Commander



Watertight Digital Media Source Unit

Just connect your iPod using the optional CCUIPOD2 cable for full control from the source unit.



- Suction or Screw-In Mounting
- Multi-Angle Adjustable



Everything You Need to Make Serious Waves

MARINE AMPLIFIERS



XN3410

XN3210

Feature Comparison

	Maximum Power Output	4-Ohm	2-Ohm	Type	Number of Channels	Dimensions (W" x L" x H")	CEA-2006 Power Ratings
XN3410	720W	90W x 4	165W x 4	Class AB	4/3/2	15-3/4" x 9" x 2-5/8"	110W x 4 RMS [4Ω @ 14.4V ≤ 1% THD+N] S/N 97dB (Ref: 1W into 4Ω)
XN3210	360W	90W x 2	160W x 2	Class AB	2/1	13" x 9" x 2-5/8"	100W x 2 RMS [4Ω @ 14.4V ≤ 1% THD+N] S/N 95dB (Ref: 1W into 4Ω)

MARINE SPEAKERS



CMG2510W



CMG1620S



CMG1620R



CMG1720R

Feature Comparison

	Size	Maximum Power	Type	CEA-2031 Speaker Rating
CMG2510W	10"	250W	Water-Resistant Subwoofer	Maximum RMS Power: 100 watts Impedance: 4 ohms
CMG1620S	6-1/2"	90W	Water Resistant 2-Way Component Speaker System	Maximum RMS Power: 35 watts Impedance: 4 ohms
CMG1620R	6-1/2"	90W	Water-Resistant 2-Way Coaxial	Maximum RMS Power: 35 watts Impedance: 4 ohms
CMG1720R	7"	90W	Water-Resistant 2-Way Coaxial	Maximum RMS Power: 35 watts Impedance: 4 ohms

PERFORMANCE SUBWOOFERS/SPEAKERS



CMQ2010W

CMQ2510W



CMQ1620R



CMQ1720R




CMQ6930R

Feature Comparison

	Size	Maximum Power	Type	CEA-2031 Speaker Rating
CMQ2010W	8"	200W	Water-Resistant Subwoofer	Maximum RMS Power: 100 watts Impedance: 4 ohms
CMQ2510W	10"	300W	Water-Resistant Subwoofer	Maximum RMS Power: 140 watts Impedance: 4 ohms
CMQ1620R	6-1/2"	100W	Water-Resistant 2-Way Coaxial	Maximum RMS Power: 50 watts Impedance: 4 ohms
CMQ1720R	7"	120W	Water-Resistant 2-Way Coaxial	Maximum RMS Power: 60 watts Impedance: 4 ohms
CMQ6930R	6" x 9"	120W	Water-Resistant 3-Way Multiaxial	Maximum RMS Power: 60 watts Impedance: 4 ohms

ILLUMINATED GRILLES

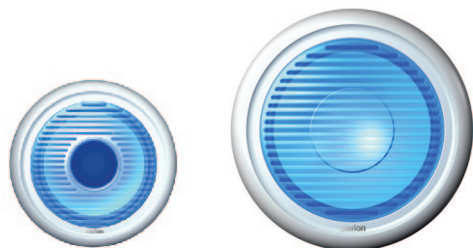

CML1600
Illuminated Grille for
6-1/2" Marine Speaker

CML2500
Illuminated Grille for 10"
Marine Subwoofer

System Control from Anywhere Onboard

MW1
Watertight Marine Remote Control with LCD
for CMD6, CMD7, CMS1, CMV1 & M309



MW2
Watertight Marine Remote Control
for CMD6, CMD7, CMS1, CMV1 & M309



MF1
RF Wireless Remote Control
for CMD6, CMD7, CMS1, CMV1 & M309



OPTIONAL ACCESSORIES

CCAAUX
RCA/3.5mm AUX Input Cable



CCAUUSB
USB Extension Cable



CCUIPOD2
Connection Cable for iPod for CMS1



MWRXCRET
25' Marine Remote Extension Cable for MW1/2



MWRYCRET
Remote Y-cable for MW1/2

